


Together, we power ahead.

GENERATING SET

power selector

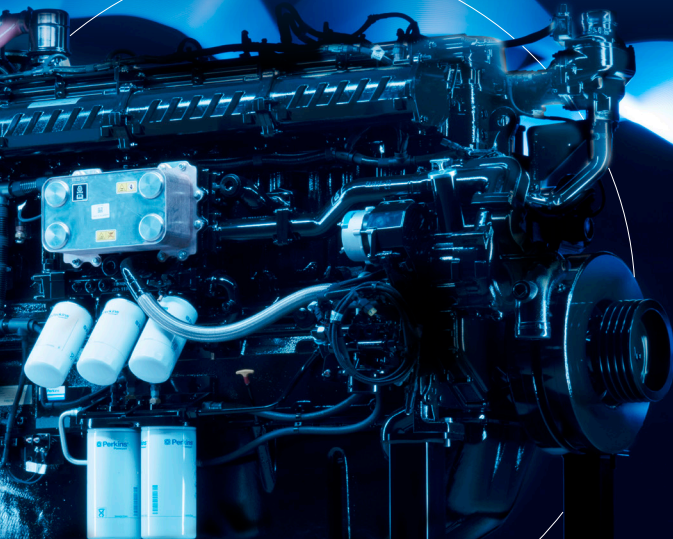

 Perkins®

Contents

Explanatory notes	3
--------------------------	----------

Certified models

50 Hz @ 1500 rpm	5
-------------------------	----------

EU Stage V, Stage IIIA >19 kW, Stage II, India CPCB II,
China Nonroad Stage III

60 Hz @ 1800 rpm	8
-------------------------	----------

U.S. EPA Tier 4 Interim and Tier 4 Final - U.S. EPA 40 CFR Part 60
U.S. EPA Tier 4 Final - U.S. EPA 40 CFR Part 1039,
UN ECE R96 Stage IIIA

Emergency stationary equipment (ESE) models

60 Hz @ 1800 rpm	9
-------------------------	----------

Fuel optimised models

50 Hz @ 1500 rpm	11
-------------------------	-----------

60 Hz @ 1800 rpm	16
-------------------------	-----------

Explanatory notes

Continuous operating power (COP)

Unlimited hours usage with an average load factor of 100% of the published continuous operating power. No overload is permitted.

Prime power

Unlimited hours usage at variable load. Please refer to the engine technical data sheets for specific load factor and overload allowances.

Standby power

Power available in the event of a main power network failure, which may be run continuously up to 500 hours annual usage at variable load. Please refer to the engine technical data sheets for specific load factor. No overload is permitted.

Emergency stationary equipment (ESE)

- Where ratings are used in the U.S. in emergency stationary equipment (ESE) under US Regulation Title 40 CFR Part 60 Subpart III, the engine may be run in non-emergency situations for maintenance/testing purposes, but such running should be limited to 100 hours per year. Please refer to regulations for exact guidance.
- For ESE engines please consult with your local Perkins representative to ensure the build list you order has appropriate emissions labelling for the territory.
- For <19 kW models, Tier 4 Final pre-NTE and NRTC emissions standards apply.

Data centre power (DCP)

- Unlimited hours usage at constant or variable load with up to 100% load factor. Please refer to the engine technical data sheets for overload allowances. Prolonged parallel operation with utility not permitted.
- 'Y' in the DCP column indicates that a model has ratings for data centre power. These ratings are normally offered at equivalent or equal power to the prime power rating.

Ratings

- All ratings data based on operation under ISO 8528-1 and ISO 3046 conditions using typical fan sizes and drive ratios. Performance tolerance quoted by Perkins is +/-5%.
- All ratings are rounded to the nearest whole number and are for guidance only. Please refer to the relevant technical data sheet for accurate powers.
- Electrical output is based on assumed alternator efficiency and is for guidance only.
- kVA figures are calculated using a typical power factor of 0.8.

Switchable (1500/1800 rpm)

- 'Y' in the 1500/1800 rpm column indicates a model has the capability to be switched between 1500 and 1800 rpm speeds.
- Switchable engines must be requested at point of order, please consult with your local Perkins representative.

Emissions

Some documentation will make reference to historical emissions legislation. Contact your Perkins representative to confirm current emissions status.

Terms and conditions

Perkins conditions of sale apply.

50 Hz - 1500 rpm		Emissions certification	Aftertreatment	Net engine output		Typical generator set output				DCP	1500/ 1800 rpm
Litres	Model			Prime	Standby	Prime		Standby			
				kW	kW	kWe	kVA	kWe	kVA		
0.51	402J-05G	EU Stage V	-	4	4	3	4	3	4	-	-
0.76	403J-07G	EU Stage V	-	5	6	5	6	5	6	-	-
1.1	403J-11G	EU Stage V	-	8	9	7	9	8	10	-	-
2.2	404D-22G	EU Stage IIIA	-	18	20	16	20	18	22	-	-
	404J-22G	EU Stage V		19	21	16	20	18	22		
3.3	1103D-33G2	EU Stage IIIA	-	29	32	25	32	28	35	-	Y
	1103D-33G3			29	32	25	32	28	35		-
4.4	1104D-44TG2	EU Stage IIIA	-	54	59	48	60	53	66	-	Y
	1104D-44TG3			54	59	48	60	53	66		-
	1104D-E44TAG1			74	81	64	80	70	88		Y
	1104D-E44TAG2			91	101	80	100	88	110		
	1204J-E44TTAG2	EU Stage V	DOC+DPF+SCR	107	119	97	123	109	136		

50 Hz - 1500 rpm		Emissions certification	Aftertreatment	Net engine output		Typical generator set output				DCP	1500/ 1800 rpm
Litres	Model			Prime	Standby	Prime		Standby			
				kW	kW	kWe	kVA	kWe	kVA		
7.0	1106D-E70TAG2	EU Stage IIIA	-	129	143	117	147	130	163	-	Y
	1106D-E70TAG3			141	156	129	161	142	177		
	1106D-E70TAG4			165	182	144	180	160	200		
	1206J-E70TTAG3	EU Stage V	DOC+DPF+SCR	172	191	159	198	175	219		
	1206D-E70TTAG1	EU Stage IIIA	-	178	196	160	200	176	225		
	1206D-E70TTAG2			196	218	184	225	200	250		
	1206D-E70TTAG3			218	240	200	250	220	275		
9.3	1706J-E93TAG1	EU Stage V	DOC+DPF+SCR	221	244	206	257	277	284	Y	-
	1706J-E93TAG2			265	292	244	305	269	336		Y
12.5	2206D-E13TAG3	China NR III	-	349	392	320	400	360	450	Y	-
		India CPCB II		349	-	320	400	-	-		-
	2406J-E13TAG3	EU Stage V	DOC+DPF+SCR	349	385	328	410	362	452		Y

50 Hz - 1500 rpm		Emissions certification	Aftertreatment	Net engine output		Typical generator set output				DCP	1500/ 1800 rpm
Litres	Model			Prime	Standby	Prime		Standby			
				kW	kW	kWe	kVA	kWe	kVA		
15.2	2506D-E15TAG2	EU Stage IIIA	-	435	478	400	500	440	550	Y	-
		China NR III		435	478	400	500	440	550		
		India CPCB II		435	-	400	500	-	-		
18.1	2806J-E18TAG1	EU Stage V	DOC+DPF+SCR	479	530	444	554	488	610	Y	Y
	2806D-E18TAG1A	China NR III	-	522	574	480	600	528	660		-
		India CPCB II		522	-	480	600	-	-		
23.0	4006D-E23TAG2	India CPCB II	-	638	702	600	750	660	825	Y	-
30.0	4008D-E30TAG1	India CPCB II	-	693	769	648	810	720	900	Y	-
	4008D-E30TAG2			772	855	728	910	808	1010		

60 Hz - 1800 rpm		Emissions certification	Aftertreatment	Net engine output		Typical generator set output				DCP	1500/ 1800 rpm
Litres	Model			Prime	Standby	Prime		Standby			
				kW	kW	kWe	kVA	kWe	kVA		
1.1	403F-11G	Tier 4 Final	-	9	9	7	9	8	10	-	-
1.5	403F-15G	Tier 4 Final	-	12	14	11	14	12	15	-	-
4.4	1204J-E44TTAG2	Tier 4 Final	DOC+DPF+SCR	110	122	101	126	112	140		Y
7.0	1206J-E70TTAG3	Tier 4 Final	DOC+DPF+SCR	151	168	135	169	150	188	-	Y
	1206J-E70TTAG4			200	222	180	225	200	250		
	1206D-E70TTAG1	R96 Stage IIIA	-	202	224	180	225	200	250		
	1206D-E70TTAG2			202	224	180	225	200	250		
	1206D-E70TTAG3			202	224	180	225	200	250		
9.3	1706J-E93TAG2	Tier 4 Final	DOC+DPF+SCR	291	321	267	334	296	369	Y	Y
12.5	2406J-E13TAG3	Tier 4 Final	DOC+DPF+SCR	364	403	342	428	379	474	Y	Y
18.1	2806F-E18TAG1	Tier 4 Final	DOC+DPF+SCR	475	529	455	569	500	625	Y	-

60 Hz - 1800 rpm		Equivalent to	Net engine output		Typical generator set output				DCP	1500/ 1800 rpm
Litres	Model		Prime	Standby	Prime		Standby			
			kW	kW	kWe	kVA	kWe	kVA		
0.51	402D-05G	Tier 4 Interim	5	5	4	5	4	5	-	-
0.76	403D-07G	Tier 4 Interim	7	7	6	7	6	8	-	-
1.1	403D-11G	Tier 4 Interim	10	11	9	11	10	12	-	-
1.5	403D-15G	Tier 4 Interim	14	16	13	16	14	18	-	-
2.2	404D-22G	Tier 4 Interim	22	24	19	24	21	27	-	-
	404D-22TG		30	33	26	33	29	36		Y
	404D-22TAG		32	36	29	36	32	40		-
4.4	1104D-44TG1	Tier 3	-	63	-	-	57	71	-	-
	1104D-E44TG1		65	71	55	68	60	75		-
	1104D-E44TAG1		85	93	73	91	80	100		Y
	1104D-E44TAG2		104	115	91	114	100	125		-
7.0	1106D-E70TAG2	Tier 3	145	161	130	162	143	178	-	Y
	1106D-E70TAG3		157	173	139	174	153	191		
	1106D-E70TAG4		180	199	160	200	175	219		
	1106D-E70TAG5		-	224	-	-	200	250		-

Refer to explanatory notes for more information

60 Hz - 1800 rpm		Equivalent to	Net engine output		Typical generator set output				DCP	1500/ 1800 rpm
Litres	Model		Prime	Standby	Prime		Standby			
			kW	kW	kWe	kVA	kWe	kVA		
9.3	1706D-E93TAG1	Tier 3	254	281	234	292	259	323	Y	-
	1706D-E93TAG2		309	341	284	356	314	393		
12.5	2206D-E13TAG2	Tier 3	349	381	320	400	350	438	Y	-
	2206D-E13TAG3		381	435	350	438	400	500		
15.2	2506D-E15TAG1	Tier 3	435	490	400	500	450	563	Y	-
	2506C-E15TAG3	Tier 2	509	562	468	585	517	646		
	2506C-E15TAG4		-	597	-	-	550	687		
18.1	2806C-E18TAG3	Tier 2	592	652	545	681	600	750	Y	Y
	2806C-E18TTAG6		685	754	650	813	716	895		-
	2806C-E18TTAG7		716	790	680	850	750	938		-
30.0	5008C-E30TAG4	Tier 2	853	947	810	1012	900	1125	Y	-
	5008C-E30TAG5		947	1053	900	1125	1000	1250		

Refer to explanatory notes for more information

50 Hz - 1500 rpm		Net engine output			Typical generator set output						DCP	1500/ 1800 rpm
Litres	Model	COP	Prime	Standby	COP		Prime		Standby			
		kW	kW	kW	kWe	kVA	kWe	kVA	kWe	kVA		
1.1	403A-11G1	-	8	9	-	-	7	9	8	10	-	-
1.5	403A-15G1	-	12	13	-	-	10	13	12	15	-	-
	403A-15G2		14	15			12	15	13	16		
2.2	404A-22G1	-	18	20	-	-	16	20	18	22	-	-
3.3	1103A-33G	-	28	30	-	-	24	30	26	33	-	Y
	1103A-33TG1		41	46			36	45	40	50		-
	1103C-33TG2		41	46			37	46	41	51		-
	1103A-33TG2		54	59			48	60	53	66		Y
4.4	1104C-44TG2	-	54	59	-	-	48	60	53	67	-	Y
	1104C-44TG3		54	59			48	60	53	67		-
	1104A-44TG1		58	64			52	65	57	72		Y
	1104C-44TAG1		72	79			64	80	71	89		
	1104A-44TG2		72	79			64	80	70	88		
	1104C-44TAG2		90	100			81	101	90	112		

Fuel optimised - 50 Hz

50 Hz - 1500 rpm		Net engine output			Typical generator set output						DCP	1500/ 1800 rpm
Litres	Model	COP	Prime	Standby	COP		Prime		Standby			
		kW	kW	kW	kWe	kVA	kWe	kVA	kWe	kVA		
7.0	1106A-70TG1	-	118	131	-	-	108	135	120	150	-	-
	1106A-70TAG2		131	144			120	150	132	165		Y
	1106A-70TAG3		158	175			144	180	160	200		-
	1106A-70TAG4		174	191			160	200	176	220		-
	1206A-E70TTAG1		177	196			160	200	176	225		Y
	1206A-E70TTAG2		196	218			184	225	200	250		
	1206A-E70TTAG3		218	240			200	250	220	275		
8.8	1506A-E88TAG1	-	180	198	-	-	166	207	182	228	Y	Y
	1506A-E88TAG2		201	223			185	231	206	257		-
	1506C-E88TAG2		201	223			185	231	206	257		Y
	1506A-E88TAG3		223	245			206	257	226	282		-
	1506C-E88TAG3		223	245			206	257	226	282		-
	1506A-E88TAG4		245	268			226	282	246	308		Y
	1506A-E88TAG5		268	293			246	308	270	337		

50 Hz - 1500 rpm		Net engine output			Typical generator set output						DCP	1500/ 1800 rpm
Litres	Model	COP	Prime	Standby	COP		Prime		Standby			
		kW	kW	kW	kWe	kVA	kWe	kVA	kWe	kVA		
9.3	1706A-E93TAG1	-	267	295	-	-	246	307	271	339	Y	Y
	1706A-E93TAG2		302	334			278	348	307	384		
12.5	2206A-E13TAG2	-	305	349	-	-	280	350	320	400	Y	Y
	2206C-E13TAG2		305	349			280	350	320	400		
	2206A-E13TAG3		349	392			320	400	360	450		
	2206C-E13TAG3		349	392			320	400	360	450		
	2206D-E13TAG3		349	392			320	400	360	450		-
15.2	2506A-E15TAG1	-	396	434	-	-	364	455	400	500	Y	Y
	2506C-E15TAG1		396	435			364	455	400	500		
	2506A-E15TAG2		435	478			400	500	440	550		
	2506C-E15TAG2		435	478			400	500	440	550		

Fuel optimised - 50 Hz

50 Hz - 1500 rpm		Net engine output			Typical generator set output						DCP	1500/ 1800 rpm
Litres	Model	COP	Prime	Standby	COP		Prime		Standby			
		kW	kW	kW	kWe	kVA	kWe	kVA	kWe	kVA		
18.1	2806C-E18TAG1A	-	514	565	-	-	473	591	520	650	Y	Y
	2806A-E18TAG1A		522	574			480	600	528	660		
	2806A-E18TAG2		565	609			520	650	560	700		
	2806A-E18TTAG4		595	657			565	706	624	780		
	2806A-E18TTAG5		648	716			616	770	680	850		
23.0	4006-23TAG2A	501	628	691	476	595	597	746	656	821	Y	Y
	4006-23TAG3A	536	675	756	509	637	641	802	718	898		-
30.0	4008-30TAG1	632	758	842	600	750	720	900	800	1000	Y	-
	4008TAG1A	606	767	844	576	720	728	911	802	1002		
	4008-30TAG2	674	851	947	640	800	808	1010	900	1125		
	4008TAG2A	681	861	947	647	809	818	1022	900	1125		
	4008-30TAG3	800	947	1055	760	950	900	1125	1000	1250		

50 Hz - 1500 rpm		Net engine output			Typical generator set output						DCP	1500/ 1800 rpm
Litres	Model	COP	Prime	Standby	COP		Prime		Standby			
		kW	kW	kW	kWe	kVA	kWe	kVA	kWe	kVA		
46.0	4012-46TAG0A	842	1053	1158	800	1000	1000	1250	1100	1375	Y	-
	4012-46TWG2A	833	1055	1166	791	989	1002	1253	1108	1385		Y
	4012-46TAG1A	909	1148	1263	864	1079	1091	1363	1200	1500		-
	4012-46TWG3A	909	1149	1263	864	1079	1092	1364	1200	1500		
	4012-46TWG4A	-	1254	1342	-	-	1204	1505	1288	1610		Y
	4012-46TAG2A	1005	1267	1395	955	1193	1204	1505	1325	1657		
	4012-46TAG3A	1200	1440	1583	1140	1425	1368	1710	1504	1880		-
61.0	4016TAG1A	1219	1537	1690	1170	1463	1476	1844	1622	2028	Y	-
	4016-61TRG1	1179	1558	1648	1120	1400	1480	1850	1600	2000		
	4016-61TRG2	1347	1684	1895	1280	1600	1600	2000	1800	2250		
	4016TAG2A	1362	1715	1886	1307	1634	1646	2058	1811	2263		
	4016-61TRG3	1500	1875	2083	1440	1800	1800	2250	2000	2500		
	4016-61TRG3X	-	2083	-	-	-	2000	2500	-	-		

Fuel optimised - 60 Hz

60 Hz - 1800 rpm		Net engine output			Typical generator set output						DCP	1500/ 1800 rpm
Litres	Model	COP	Prime	Standby	COP		Prime		Standby			
		kW	kW	kW	kWe	kVA	kWe	kVA	kWe	kVA		
3.3	1103A-33G	-	32	35	-	-	28	35	31	38	-	Y
	1103A-33TG1		49	54			43	53	47	59		
	1103A-33TG2		61	68			55	68	60	75		
4.4	1104C-44G2	-	47	52	-	-	43	53	47	59	-	-
	1104C-44TG1		60	67			54	68	60	75		
	1104C-44TG2		60	67			54	68	60	75		
	1104A-44TG1		69	76			61	76	67	84		
	1104C-44TAG1		80	89			72	91	80	100		
	1104A-44TG2		82	90			73	91	80	100		
	1104C-44TAG2		102	112			92	114	101	127		
7.0	1106A-70TG1	-	134	148	-	-	122	152	135	169	-	-
	1106A-70TAG2		147	164			135	169	150	188		
	1106A-70TAG3		173	192			158	197	175	219		
	1206A-E70TTAG1		202	224			180	225	200	250		

60 Hz - 1800 rpm		Net engine output			Typical generator set output						DCP	1500/ 1800 rpm
Litres	Model	COP	Prime	Standby	COP		Prime		Standby			
		kW	kW	kW	kWe	kVA	kWe	kVA	kWe	kVA		
8.8	1506A-E88TAG1	-	216	237	-	-	198	248	218	271	Y	Y
	1506A-E88TAG3		252	279			232	290	256	320		
	1506A-E88TAG5		306	339			282	352	312	389		
9.3	1706A-E93TAG1	-	311	343	-	-	286	357	316	395	Y	Y
12.5	2206A-E13TAG5	-	349	381	-	-	320	400	350	438	Y	Y
	2206A-E13TAG6		381	435			350	438	400	500		
15.2	2506A-E15TAG3	-	446	490	-	-	410	513	450	563	Y	Y
	2506A-E15TAG4		495	543			455	569	500	624		
18.1	2806A-E18TAG3	-	592	652	-	-	545	681	600	750	Y	Y
	2806A-E18TTAG6		685	754			650	813	716	895		-
	2806A-E18TTAG7		716	790			680	850	750	938		-
23.0	4006-23TAG2A	511	638	702	480	600	600	750	660	825	Y	Y
	4006-23TAG3A	570	715	795	542	677	679	849	755	944		-
	4006-23TAG4	607	761	842	572	714	722	900	800	1000		-

Fuel optimised - 60 Hz

60 Hz - 1800 rpm		Net engine output			Typical generator set output						DCP	1500/ 1800 rpm
Litres	Model	COP	Prime	Standby	COP		Prime		Standby			
		kW	kW	kW	kWe	kVA	kWe	kVA	kWe	kVA		
30.0	4008TAG1	610	763	843	555	694	707	884	780	975	Y	-
	4008TAG2	687	842	948	626	743	796	995	878	1097		Y
46.0	4012-46TWG2A	833	1055	1166	791	989	1002	1253	1108	1385	Y	Y
	4012-46TWG3A	909	1149	1263	864	1079	1092	1364	1200	1500		-
	4012-46TAG1A	914	1153	1267	868	1085	1095	1369	1204	1505		-
	4012-46TWG4A	-	1254	1342	-	-	1204	1505	1288	1610		-
	4012-46TAG2A	993	1272	1399	943	1179	1208	1511	1329	1661		Y
	4012-46TAG3A	1200	1440	1583	1140	1425	1368	1710	1504	1880		-

Notes



Perkins Sales

Americas

North America

1600 W Kingsbury St
Seguin
Texas 78155
United States
Toll free number: 1-888-PERK-ENG

South America

Rua Dr. Chucri Zaidan, 1240
Golden Tower – 17th Floor
São Paulo – SP CEP 04711-130
Brazil
Tel: +55 11 2109 2038

Europe, Middle East and Africa

Peterborough
PE1 5FQ
United Kingdom
Tel: +44 1733 583000

Asia

China

20/F Lei Shing International Plaza
1319 West Yan'an Road
Shanghai 200050
China
Tel: +86 21 22160774
Fax: +86 21 52136624

Japan

Ocean Gate Minato Mirai 12F
3-7-1 Minatomirai, Nishiku
Yokohama city
Kanagawa, 220-0012
Japan
Tel: +81 45 682 3579
Fax: +81 45 682 3690

Singapore

14 Tractor Road
Singapore 627973
Tel: +65 6828 7469
Fax: +65 6828 7414

Korea

11F, Songchon Building, 503
Nonhyeon-ro, Gangnam-gu
Seoul 06132
Korea
Tel: +82 10 8669 8358

India

Floor 6, Tower 'B' Prestige Shantiniketan
The Business Precinct
Whitefield Main Road
Bangalore 560048
India
Email: IPSD_India@perkins.com

www.perkins.com

Copyright © 2023 Perkins Engines Company Limited, all rights reserved. No part of this document may be reproduced in any forms or by any means, without prior written permission of Perkins Engines Company Limited. The information in this document is substantially correct at the time of printing and may be altered subsequently. 100063-EN-01 (07/23)

